

DRIVE YOUR BUSINESS FORWARD



LUBRICANTS
FOR THE HGV
INDUSTRY

Trademarks are owned or used under license.



PETRO-CANADA

LUBRICANTS

AN HF SINCLAIR BRAND



BETTER LUBRICANTS. BETTER BUSINESS. FACT.

WHETHER YOU'RE OPERATING ONE TRUCK OR RUNNING A FLEET, THE CHALLENGE IS THE SAME. **EFFICIENCY.**

Margins are everything. Every minute a truck is off the road adds costs instead of driving profits. Every pause for maintenance costs you in parts, in labour and most of all, in lost time on the road.

The secret is to reduce running costs and emissions everywhere you can, from stretching oil drain intervals to the Big One – the total costs of fuel.

That's why using the wrong lubricants can be so costly – and why using the right ones is so valuable.

EFFICIENCY, POWERED BY PETRO-CANADA LUBRICANTS

Here's another fact. Every product in our latest line of heavy-duty diesel engine oils, gear oils and speciality fluids has been engineered specifically to make your trucking business more efficient and more profitable.



READY FOR THE ROAD AHEAD

HEAVY-DUTY DIESEL ENGINE OILS

DURON™ is designed for European heavy-duty diesel engines – meeting Euro V and VI emissions standards and has ACEA accreditations.

The result – the most **durable** engine oils we've ever made.

DURON exceeds the toughest category tests of oil strength, including what you need most - better engine protection, longer time between oil drains, more reliable trucks even in extreme operating conditions - and further on every drop of fuel.

CNG/LNG ENGINE OIL

DURON GEO provides exceptional engine protection and is specifically formulated for the high combustion temperatures in today's natural gas mobile engines as well as mixed fleets.

GEAR OILS / MANUAL TRANSMISSION FLUIDS

TRAXON™ provides superb wear protection to extend equipment life and reduce maintenance costs.

GEAR OILS

TRAXON™ provides superb wear protection to extend equipment life and reduce maintenance costs.

GREASES

PRECISION™ premium multi -application and PEERLESS™ high-performance greases for high temperature, wet, and long life applications have been specially formulated for advanced protection.

HYDRAULIC FLUIDS

HYDREX™ lasts longer and provides better wear protection. HYDREX means more uptime, increased productivity and better energy efficiencies.

AUTOMATIC TRANSMISSION FLUIDS

Petro-Canada Lubricants' ATF's excel in oxidation stability and low temperature performance to deliver essential wear protection and productivity benefits.

HEAVY-DUTY ENGINE OILS

DURON™ **THE TOUGHER.** **THE BETTER.™**

Keeping your business profitable, efficient and ahead of your competitors has never been tougher.

But tough is just the way we like it.

Driven by API CK-4 we've made DURON our most durable, most protective, most advanced product line ever.

DURON's ready to improve your reliability, extend your drain intervals, and cut your fuel costs - however extreme your operating conditions.

Because when you know your oil can handle extreme challenges, you know it can handle anything.


And DURON loves a challenge.

THE TOUGHER. THE BETTER.™



EXTREME PERFORMANCE WHERE YOU SEE THESE SYMBOLS

DURON oils have advanced across a whole range of performance and protection measures. Look for the performance symbols on DURON labels.

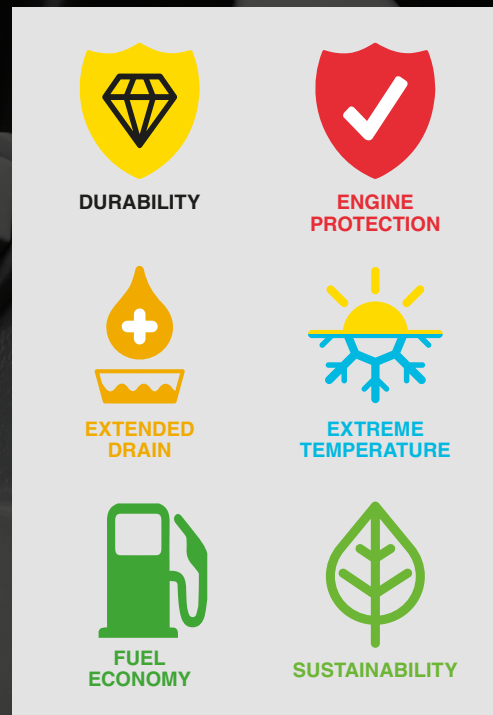

"I believe that Petro-Canada Lubricants' products are designed to meet the needs of companies like ours. They have an unsurpassed level of customer service. If I have any questions or problems, I just need to call our Petro-Canada Lubricants representative. He is always ready to help us and share his professional advice."

ALEXANDER KOVALCHUK,
PLANT MANAGER, LAFARGEHOLCIM GROUP



EXTREME PERFORMANCE

MAXIMUM DURABILITY



OXIDATION CONTROL

High operating temperatures can lead to increased oil thickness and deposit formation

AERATION CONTROL


Air bubbles can form in oil preventing the ability of the oil film to protect engine parts, potentially causing wear and maintenance/repair costs

SHEAR STABILITY

Under stress, large viscosity modifier molecules may 'shear', causing the oil to lose control of viscosity and drop out of grade which could compromise protection

DURON engine oils have the ACEA accreditation. They have outperformed the previous generation DURON product line across a number of the toughest durability tests tied to oxidation control, shear stability and aeration control.

OM501LA ENGINE TEST PART OF MB228 SPECIFICATION

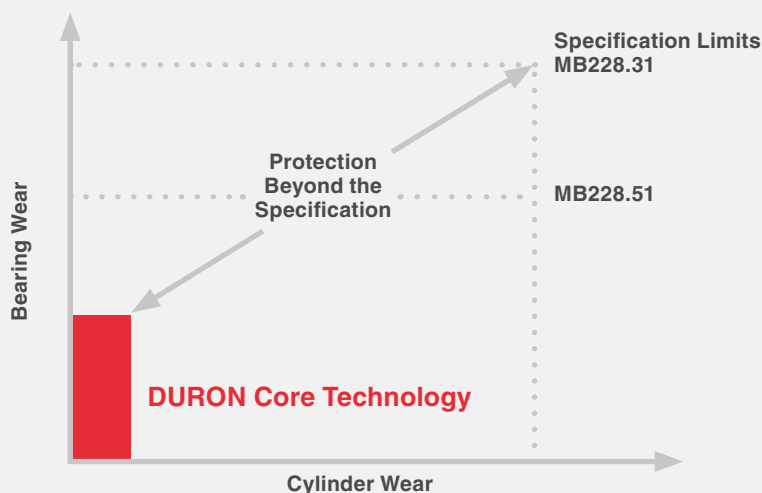

BEYOND INDUSTRY STANDARDS

In both bearing and cylinder wear control, DURON Core Technology performs far beyond industry standards.

MAXIMUM ENGINE PROTECTION



DURON engine oils provide the highest ever levels of engine protection to deliver maximum uptime for your fleet.

The proof? Look at DURON's performance in the Cummins ISB wear test, one of the toughest engine performance tests. Duron proves performance well below the specification limit.

DURON is a significant upgrade in performance compared to DURON-E as demonstrated in the Cummins ISB test that means ultimate engine protection.

TAPPET WEAR

..... TAPPET WEAR LIMIT MAX

The Lower
The Better



DURON-E
(API CJ-4)

**53%
BETTER**

DURON Core
Technology
(API CK-4)

CAM WEAR

..... CAM WEAR LIMIT MAX

The Lower
The Better



DURON-E
(API CJ-4)

**55%
BETTER**

DURON Core
Technology
(API CK-4)

EXTREME PERFORMANCE WHERE YOU SEE THESE SYMBOLS

DURON oils deliver a whole range of performance and protection advantages. Look for the performance symbols on DURON literature and even on the labels.




MAXIMUM EXTENDED DRAINS*



More uptime between oil drains adds value to the bottom line. DURON engine oils deliver extended drain capabilities with no compromise to reliability and engine protection.

EVEN WITH 63 MT LOADS

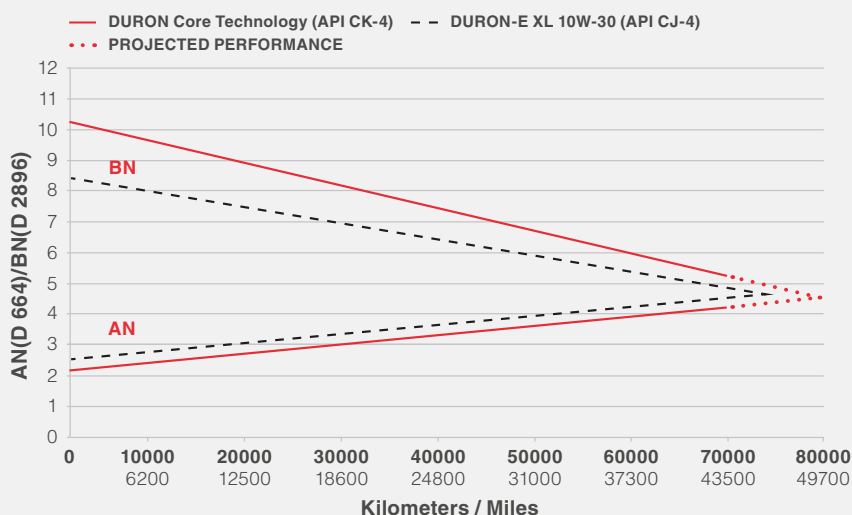


*Extending drain intervals should always be undertaken in conjunction with an oil analysis program.

EXTREME HIGH AND LOW TEMPERATURE PERFORMANCE




Maybe you're operating in freezing -40°C conditions, or searing 50°C heat. Inside your engines, temperatures could reach 500°C. DURON can handle it all. It's a brand with a reputation built on superior performance at every temperature extreme – and now DURON sets new standards.

API CK-4 SPECIFICATION LIMIT

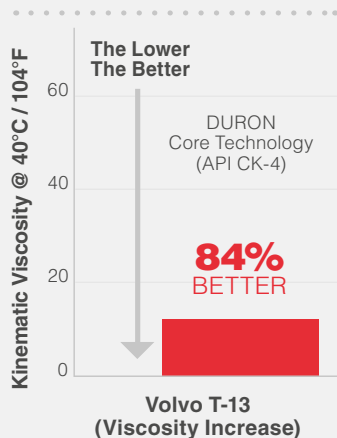

API CK-4 SPECIFICATION LIMIT

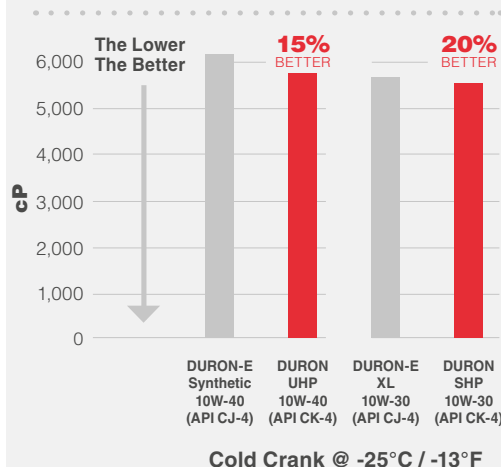


EXTREME PERFORMANCE

ENHANCED FUEL ECONOMY



Fuel. A massive variable cost. Improvements to fuel economy go straight to your bottom line. Using lower viscosity engine oils can help boost fuel economy throughout the drain interval without compromising engine protection. That's just good for business.

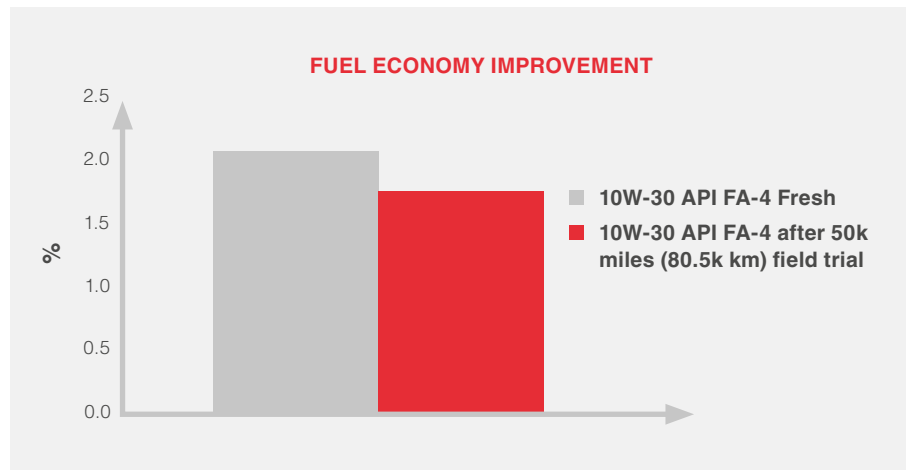

NEW AND RETAINED FUEL ECONOMY

Even after 50k miles (80.5k km) on the oil, DURON Core Technology API FA-4 10W-30 delivers up to 1.8% better fuel economy (vs. an SAE 15W-40 API CJ-4)

SUSTAINABILITY

















































Improving fuel economy is one of several ways to run more sustainably – both economically and environmentally. The growing awareness of societal impact on the environment has also increased demand for fuel saving initiatives, and legislation and more stringent emission targets are changing the requirements for the next class of engine oil categories. The best-fit Petro-Canada Lubricants engine oils and lubricants can optimize your fleet efficiency, enabling you to focus on environmental social governance (ESG) goals, or the measure of the long-term environmental, social and governance factors that are often overlooked during traditional financial analyses.

DURON can help support your sustainability goals - it keeps you on the road for longer by extending drains and moving to lower viscosity reduces fuel consumption.

DURON ON-ROAD

The DURON on-road product line delivers immediate efficiency gains, including the potential for extended drain intervals* and fuel savings.

		Durability	Engine Protection	Extended Drain	Extreme Temperature	Fuel Economy	Sustainability
DURON^{HP} High Performance	DURON HP 15W-40						
DURON^{SHP} Super High Performance	DURON SHP 15W-40						
	DURON SHP 10W-30						
DURON^{UHP} Ultra High Performance	DURON UHP-E 10W-40 						
	DURON UHP 10W-40						
	DURON UHP-E 5W-30 						
	DURON UHP 5W-30 CK-4						
DURON^{ADVANCED}	DURON ADVANCED 10W-30 FA-4						
	DURON ADVANCED 5W-30 FA-4						

*Extending drain intervals should always be undertaken in conjunction with an oil analysis program.

OILS GEAR

TRAXON

EXTENDS YOUR EQUIPMENT
LIFE AND REDUCES MAINTENANCE

Petro-Canada Lubricants' TRAXON is your best choice for a premium multigrade line of gear oils. TRAXON gear oils are specially formulated to provide excellent shear stability and longer oil life for exceptional long-lasting protection to help you extend equipment life and reduce downtime and maintenance costs.

YOUR ULTIMATE PROTECTION PLAN.



TRAXON E SYNTHETIC

A premium line of synthetic lubricants formulated to meet the “Genuine Roadranger” extended drain and warranty performance requirements set by Eaton Corporation (for transmissions) and Dana CVSD Corporation (for axles).

TRAXON SYNTHETIC

Year-round full synthetic gear oils formulated to provide extended drain capabilities and outstanding temperature protection in extreme cold weather conditions.

TRAXON SYNTHETIC MTF 75W-80

Suitable for Volvo I-Shift and Mack mDrive synchronized automated manual transmission applications and can be used in a range of existing and new vehicles using ZF transmissions, including those fitted with ZF-Intarders.

TRAXON XL SYNTHETIC BLEND

These multigrade gear oils deliver excellent low temperature protection, better shear stability and longer oil life for exceptional long-lasting protection.

TRAXON

Formulated to provide exceptional long-lasting wear protection, these multigrade gear oils extend equipment life and reduce downtime and maintenance costs.



PROTECT YOUR FLEET. DRIVE YOUR PRODUCTIVITY.



TRANSMISSION

- TRAXON™ E Synthetic MTF
- DuraDrive™ HD Synthetic Blend ATF
- TRAXON Synthetic CD-50
- TRAXON SyntheticMTF 75W-80

WHEEL BEARINGS

- PRECISION™ Synthetic EP00



DIFFERENTIALS AND AXLES

- TRAXON 80W-90, 85W-140
- TRAXON XL Synthetic Blend 80W-140, 75W-90
- TRAXON E Synthetic 75W-90, 80W-140
- TRAXON Synthetic 75W-90



KING PIN & FIFTH WHEEL

- PRECISION XL 3 Moly EP1 & EP2
- PEERLESS™ OG2 or OG2 Red
- VULTREX™ G-124



*Extending drain intervals should always be undertaken in conjunction with an oil analysis program. Note: These are general guidelines containing select Petro-Canada Lubricants products that may be most suitable for your fleet. You should always follow your OEM recommendations. Please contact a Petro-Canada Lubricants representative or visit our website, petrocanadalubricants.com for more information and our complete product listing.



AN HF SINCLAIR BRAND

Fleets that know lubricants matter choose Petro-Canada Lubricants. Our complete heavy-duty lubricant product line has a global reputation for performance levels so high, it makes fleets more reliable and businesses more profitable.

DURON™ is our most durable heavy-duty diesel engine oil ever. ACEA E7, E8 and E11 ready and approved by leading OEMs. DURON is designed to take you further between oil drains* and help you use less fuel across your whole fleet.

ENGINE CRANKCASE

- DURON HP
- DURON SHP
- DURON UHP
- DURON UHP-E

CLUTCH BEARINGS

- PRECISION Synthetic
- PRECISION XL EP1 AND EP2

GREASE POINTS, RODS & PINS

- PRECISION Synthetic
- PRECISION XL EP
- PRECISION SYNTHETIC 220



LUBRICANTS

AN HF SINCLAIR BRAND

PERFORMANCE GREASES



PRECISION Synthetic, PRECISION Synthetic 220, PRECISION XL EP2 and PRECISION XL EP1 all meet NLGI Automotive Service Classification GC-LB for wheel bearing and chassis lubrication.

PRECISION

TRUSTED PROTECTION AND PERFORMANCE

Petro-Canada Lubricants' PRECISION EP lithium greases give you improved resistance to water washout, longer life under extreme conditions and outstanding resistance to shearing. PRECISION Synthetic, PRECISION Synthetic 220, PRECISION XL EP2 and EP1 have NLGI's GC-LB certification.

PRECISION SYNTHETIC

- › Longer life under extreme conditions and outstanding resistance to shearing
- › Wide operating temperature range: -40°C/-40°F to 170°C/338°F

PRECISION SYNTHETIC EP00

- › Designed primarily for the lubrication of truck/trailer wheel-end bearings and leaky gearcases
- › Wide operating temperature range: -40°C/-40°F to 170°C/338°F

PRECISION XL EP1 and XL EP2

- › Recommended for heavy-duty and general purpose bearings
- › Designed for low or high speed applications

PRECISION SYNTHETIC 220

- › Formulated to lubricate equipment in extreme cold environments and intended for applications requiring a stiffer consistency or a higher viscosity than PRECISION Synthetic
- › Wide operating temperature range: -35°C/-31°F to 170°C/338°F



PEERLESS

DEMAND THE BEST

Premium multi-application calcium sulphonate complex greases formulated to reduce your operating costs and provide extended protection in high temperatures or wet conditions.

PEERLESS OG2 RED

- This multi-application, long-life grease is formulated for the lubrication of loaded bearings, universal joints and chassis, in industry, transport, marine and offshore applications
- Carries the NLGI GC-LB for performance in heavy-duty chassis applications and wheel bearing lubrication, and also has the new NLGI High Performance Multiuse (HPM) certification

PEERLESS 3 MOLY 322

- Increased protection for longer in severe heavy-duty use, with molybdenum disulphide to protect through cold, heat and water
- Ideal for applications with low speed, severe, heavy-duty applications in which high temperatures are encountered and wear protection is critical



PEERLESS LLG, OG1, OG2 and OG2 Red all meet NLGI Automotive Service Classification GC-LB for wheel bearing and chassis lubrication.



PEERLESS OG2 Red and LLG meet the standard for NLGI High Performance Multiuse (HPM) Certification.

CNG/LNG ENGINE OILS

ADVANCED ENGINE PROTECTION

Specially formulated for the high combustion temperatures in today's Compressed Natural Gas/Liquefied Natural Gas (CNG/LNG) mobile engines. The proven performance technology in DURON GEO LD 15W-40 delivers exceptional engine protection and stay-in-grade capability, helping to maintain the power and fuel economy of "like new" performance longer.

NOW, DURON GEO LD ALSO PROVIDES
PREMIUM PERFORMANCE FOR HEAVY-DUTY
DIESEL AND GASOLINE ENGINES.



EXCEEDING ALL OEM-REQUIRED TESTS

Not only have DURON GEO LD 15W-40 and 10W-30 earned Cummins CES 20092 approvals, they are fully backserviceable to CES 20085 specifications. DURON GEO LD oils are also API Service CK-4/SN licensed and approved by other major diesel engine OEMs like Detroit Diesel, Mack, Volvo and Renault. For engines requiring Cummins CES 20074 approvals, use SENTRON VTP 10W-40.

START PURE. FINISH STRONG

Like all DURON heavy-duty engine oils, DURON GEO LD engine oils begin with an ultra-pure, high quality base oil and are specially formulated to deliver better performance and longer-lasting protection. In the end, better base oils mean better performance, so your entire fleet of engines gets the ultimate in performance benefits from your oil.

ALL-WEATHER PERFORMANCE

In cold temperatures, DURON GEO LD pumps quickly and easily through the engine, providing exceptional protection against wear and tear that can occur if the oil thickens at low temperatures. DURON GEO LD also performs well in high operating temperatures, providing exceptional shear stability and stay-in-grade capability.

ADVANCED ENGINE PROTECTION

Using consistently high quality engine oils can help engines maintain optimal power and fuel economy. With its high resistance to nitration and oxidative thickening, DURON GEO LD protects your mobile engines.

DURON GEO LD PROTECTS YOUR INVESTMENT

You've made the investment in natural gas, now it's important to protect that investment as best you can. With DURON GEO LD you get a premium oil and all the benefits it provides – extended drain intervals up to 1000 hours*, best-in-class all-weather performance, and proven performance technology for exceptional engine protection and stay-in-grade capability.

DURON GEO LD engine oils have earned the demanding Cummins CES 20092 approval and they are backserviceable to CES 20085 specifications. With suitability in both heavy-duty diesel and gasoline engines, DURON GEO LD is an ideal choice for ultimate protection in mixed fleets.

EXTENDED DRAIN INTERVALS

DURON GEO LD engine oils retain their fresh oil properties longer, making it possible for you to safely extend your drain intervals up to 1000 hours* without the risk of increased engine wear and sluggish performance. Your trucks can spend more time on the road and you can save on costly downtime and manpower.

*Extending drain intervals should always be undertaken in conjunction with an oil analysis program.

AUTOMATIC TRANSMISSION FLUIDS

AUTOMATIC TRANSMISSION FLUIDS

Petro-Canada Lubricants' ATFs represent a careful balance of properties needed to meet and exceed the requirements of automatic transmissions. Petro-Canada Lubricants' ATFs excel in oxidation stability, low-temperature fluidity and wear protection to deliver the performance you require and the increased productivity you want.



DURADRIVE™ HD SYNTHETIC BLEND ATF

Petro-Canada Lubricants offers ATFs specifically formulated for commercial and heavy-duty applications. DuraDrive Heavy-Duty (HD) Synthetic Blend ATF is the preferred fluid during the standard and extended warranty period for the Voith Turbo DIWA transmissions in North America.

Approved for: Voith (H55.6336. xx DIWA Service Bulletin 013 and 118, formerly G1363) 72,000 mile and ZF TE-ML 14B extended drain applications. Additional recommended applications included in OEM chart at the back of the brochure.




DURADRIVE HD SYNTHETIC 668

Full synthetic heavy-duty automatic transmission fluid for severe duty and extended drain intervals, specifically designed and approved for use in transmissions requiring Allison TES 668® fluids (Approval # AN668-10012020). Backwards compatible to Allison TES 295® fluids.

Petro-Canada Lubricants also offers automatic transmission fluids for DEXRON™-VI, ATF+4®, MERCON®-V and MERCON®-LV applications.

MERCON® is a registered trademark of Ford Motor Company.
DEXRON™ is a registered trademark of General Motors LLC.
ATF+4® is a trademark of FCA US LLC, used under license.
TES 295® and TES 668® are trademarks of Allison Transmission, Inc.



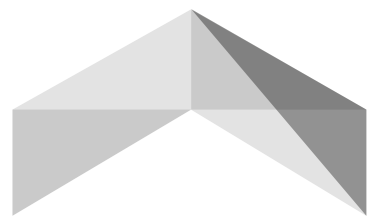

HYDRAULIC FLUIDS

RAISE YOUR **GAME**

WITH HYDREX, YOU CAN REDUCE
MAINTENANCE AND MECHANICAL
FAILURES, AND PROLONG THE LIFE
OF YOUR EQUIPMENT.

Proven to provide up to 2x¹ better wear protection than global competitors, its combination of pure base oils and carefully selected additives delivers exceptional anti-wear protection. HYDREX lasts up to 3x¹ longer than global competitors extending drain intervals and reducing time and money spent on fluid change-outs.

Designed for hydraulic systems exposed to wide temperature ranges, HYDREX multigrade products increase equipment precision and responsiveness even in the toughest conditions.



¹Measured against leading North American hydraulic oil brands.

APPROVED FOR YOUR ENGINES BY THE WORLD'S OEMs

HEAVY-DUTY DIESEL ENGINE OIL Recommended Applications



Products		DURON HP 15W-40	DURON SHP 15W-40	DURON SHP 10W-30	DURON UHP 10W-40	DURON UHP 5W-30	DURON UHP 5W-40	DURON UHP 0W-30 / 0W-40	DURON ADVANCED 5W-30 / 10W-30	DURON UHP-E 5W-30	DURON UHP-E 10W-40
	ACEA	✓ E7, E11	✓ E7, E11	✓ E7, E11	✓ E7, E11	✓ E7, E9	✓ E7, E9			✓ E7, E8, E11	✓ E7, E8, E11
	Allison						★ TES 439				
	API	★ CK-4 / SN	★ CK-4 / SN	★ CK-4 SN*	★ CK-4 / SN	★ CK-4 SN*	★ CK-4 SN	• CK-4 / SN	★ FA-4	✓ CK-4	✓ CK-4
	Caterpillar	✓ ECF-3, TO-2	✓ ECF-3, TO-2	✓ ECF-3, TO-2	✓ ECF-3, TO-2	✓ ECF-3, TO-2	✓ ECF-3, TO-2	• ECF-3, TO-2		✓ ECF-3	✓ ECF-3
	Cummins	★ CES 20086	★ CES 20086	★ CES 20086	★ CES 20086	★ CES 20086	★ CES 20086	• CES 20086	★ CES 20087	• CES 20086	• CES 20086
	DAF	✓ Standard Drain	✓ Standard Drain	• Standard Drain	✓ Standard Drain	• Standard Drain	• Standard Drain			✓ Standard Drain	✓ Standard Drain
	Detroit Diesel	★ DFS 93K222	★ DFS 93K222	★ DFS 93K222	★ DFS 93K222	★ DFS 93K222	★ DFS 93K222		★ DFS 93K223	• DFS 93K222	• DFS 93K222
	Deutz	★ DQC III-18 LA	★ DQC III-18 LA		★ DQC III-18 LA					• DQC IV-18 LA	• DQC IV-18 LA
	Ford	★ WSS-M2C171-F1	★ WSS-M2C171-F1	★ WSS-M2C171-F1	★ WSS-M2C171-F1	★ WSS-M2C171-F1	★ WSS-M2C171-F1		✓ WSS-M2C214-B1		
	GM	• 9985930	• 9985930	• 9985930	• 9985930						
	JASO	• MA2, DH-1 DH-2	• MA2, DH-1 DH-2	• MA2, DH-1 DH-2	• MA2, DH-1 DH-2	• MA2	• MA2, DH-1 DH-2	• MA2			• DH-2-21
	Mack	★ EOS-4.5	★ EOS-4.5	★ EOS-4.5	★ EOS-4.5	★ EOS-4.5	★ EOS-4.5			★ EOS-4.5	★ EOS-4.5
	MAN	• 3575, 3275-1	• 3575, 3275-1				• 3575			★ M 3775** • M 3575	★ M 3775** • M 3575
	Mercedes-Benz***	★ DTFR 15C100	★ DTFR 15C100	★ DTFR 15C100	• DTFR 15C100					★ DTFR 15C110**	★ DTFR 15C120**, DTFR 15C110
	MTU	★ Type 2.1	★ Type 2.1		• Type 2.1		• Type 2.1			• Type 3.1	• Type 3.1, Type 2.1
	Renault	★ RLD-3	★ RLD-3	★ RLD-3	★ RLD-3	★ RLD-3	★ RLD-3			★ RLD-3	★ RLD-3
	Volvo	★ VDS-4.5	★ VDS-4.5	★ VDS-4.5	★ VDS-4.5	★ VDS-4.5	★ VDS-4.5			★ VDS-4.5	★ VDS-4.5

★ Approved for Use | • Suitable for Use | ✓ Meets Specifications

* Use of a diesel engine oil for gasoline applications may compromise the life of the emissions device. Please refer to the owner's manual to ensure proper oil is used.

** Approval pending.







*** DTFR 15C100 is formerly known as MB 228.31. DTFR 15C110 was MB 228.51 and DTFR 15C120 was MB 228.52.






HYDRAULIC FLUIDS Recommended Applications

Products	HYDREX AW 32	HYDREX AW 46	HYDREX AW 68	HYDREX MV 32	HYDREX MV 46	HYDREX MV 68	HYDREX XV All Season
Bosch Rexroth Fluid Rating List RDE 90245	★	★	★	★	★	◆	◆
Denison HF-0, HF-1, HF-2	★	★	★	★	★	★	★
Danfoss (Formerly Eaton) E-FDGN-TB002-E	★	★	★	★	★	★	★

★ Approved for Use | ◆ Recommended for Use

CNG/LNG Recommended Applications

Products		DURONGEO LD 15W-40		DURON GEO LD 10W-30	
	ACEA	✓	E7, E9	✓	E7, E9
	API	★	CK-4/SN	★	CK-4/SN
	Caterpillar	✓	ECF-3	✓	ECF-3
	Cummins	★	CES 20092, CES 20086	★	CES 20092, CES 20086
	Detroit Diesel	★	DFS 93K222	★	DFS 93K222
	JASO	•	DH-2	•	DH-2

Products		DURON GEO LD 15W-40		DURON GEO LD 10W-30	
	Mack	★	EOS-4.5	★	EOS-4.5
	Mercedes-Benz*	✓	DTFR 15C100		
	MTU	✓	TYPE 2.1		
	Renault	★	RLD-3	★	RLD-3
	Volvo	★	VDS-4.5	★	VDS-4.5

★ Approved for Use | • Suitable for Use | ✓ Meets Specifications

* DTFR 15C100 is formerly known as MB 228.31.

GEAR OILS Recommended Applications

Products	TRAXON 80W-90	TRAXON 85W-140	TRAXON XL Synthetic Blend 75W-90	TRAXON XL Synthetic Blend 80W-140	TRAXON Synthetic 75W-85	TRAXON Synthetic 75W-90	TRAXON E Synthetic 75W-90	TRAXON E Synthetic 80W-140	TRAXON E Synthetic MTF	TRAXON Synthetic CD-50	TRAXON Synthetic MTF 75W-80
API GL-4										✓	✓
API GL-5	✓	✓	✓	✓	✓	✓	✓	✓			
API MT-1	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Bosch TE-ML 08											•
CNH MAT 1316	•	•									
CNH MAT 3511		•		•		•					
Dana CVSD SHAES 256 Rev E (EATON TCMT0020-EN U.S Listed)							★				
Dana CVSD SHAES 429 Rev A* (EATON TCMT0020-EN U.S Listed)							★	★			
Detroit Diesel DFS93K219.01 (also listed as DTFR 12B140 or MB 235.8)							★				
Eaton PS-164 Rev 7 (obsolete)										•	
Eaton PS-386 ** (TCMT0020-EN U.S Listed)									★	•	
Ford M2C-94A / M2C -197A	•										
Ford M2C-200B and M2C-201A			•			•					
International TMS 6816 / Navistar MPAPS B-6816 Type I							✓			•	
International TMS 6816 / Navistar MPAPS B-6816 Type II									✓	•	
Iveco 18-1807 MSG-1											•
John Deere JDM J11E	•	•	•	•	•	•					
Navistar MPAPS B-6821							✓	✓			
Mack GO-J	★	★	★	★		★		★			
Mack GO-J Plus							★				
Mack TO-A Plus									★	•	
MAN 342 Typ M1 (obsolete)	•	•		•		•	•	•			
MAN 342 Typ M2	★			•		★					
MAN 341 Typ Z4***											★
Meritor O-76-A (obsolete)		✓									
Meritor O-76-B (obsolete)				✓				✓			
Meritor O-76-D (obsolete)	✓										
Meritor O-76-E (obsolete)			✓		W	✓	✓				
Meritor O-76-Q (obsolete)						•					
Meritor O-76-N (obsolete)							★				
Meritor O-76-R (obsolete)								•			
Meritor O-80 (obsolete)								•			
Meritor O-81									★	•	
Meritor O-94	✓	✓	✓	✓	✓	✓	✓	✓			
Meritor O-95						★	★	★			
SAE J2360 ****	★	★	★	★	★	★	✓	✓			
Scania STO 1:0 (axles)		•		•							
Scania STO 1:0 (axles and gearboxes/MT)	•		•			•					
Volvo Std 1273.05 - 97305										•	•
Volvo Std 1273.07 - 97307										•	•
Volvo Std 1273.12 - 97312					•	•					
Volvo Std 1273.10 - 97321	•	•	•	•	•	•					
Volvo Std 1273, (15, 18 & 19) - 973 (15,18 and 19)										•	
Voith Retarder Class B											•
ZF TE-ML - 01L, 02L, 16K											★ (ZF002286)
ZF - Freedom Line (ZF-AS Tronic)- Applications											✓
ZF -Ecolite, Ecomid, Etronic- Applications											✓
ZF TE-ML - 17B	★ (ZF000764 and ZF003389)					★ (ZF002212)					
ZF TE-ML - 05A, 12M, 16B, 19B, 21A	★ (ZF000764 and ZF003389)										
ZF TE-ML - 05A, 12M, 16D, 21A		★ (ZF000778 and ZF003390)		★ ZF002287							
ZF TE-ML - 05A, 12N, 16B, 19C, 21A						★ (ZF002212)					

★ Approved for Use | • Suitable for Use | ✓ Meets Specifications

* Products meeting these specifications are required as part of the Eaton "Genuine Roadranger" extended drain and warranty performance requirements set by Eaton Corporation (for transmissions) and Dana CVSD Corporation (for axles)

** For use in Eaton transmissions such as UltraShift Plus, Fuller Advantage Series (FAS), FR and RT Series

*** Approval from MAN North America only

**** SAE J2360 global standard (formerly MIL-PRF-2105E)

GREASES Recommended Applications

Products	NLGI Grade	Composition	Operating Temperature Range (°C)	Application	Certification
PRECISION Synthetic	1	Lithium Complex (Colour = Gold)	-40 to 170	Specially designed to provide protection over a wide range of operating temperatures, for all-season protection. Delivers outstanding cold weather performance without compromising high temperature lubrication.	NLGI GC-LB
PRECISION XL EP1	1	Lithium Complex (Colour = Green)	-25 to 160	Specially designed for automotive wheel bearings, chassis points on on-road and off-road vehicles.	NLGI GC-LB
PRECISION Synthetic EP00	00	Lithium Complex (Colour = Gold)	-40 to 170	Semi-fluid grease. Specifically designed for lubricating truck/trailer wheel-end bearings.	
PRECISION Synthetic 220	1	Lithium Complex (Colour = Gold)	-35 to 170	Formulated to lubricate equipment in extreme cold environments. Intended for applications requiring a stiffer consistency or a higher viscosity than PRECISION Synthetic.	NLGI GC-LB
PRECISION XL EP2	2	Lithium Complex (Colour = Green)	-20 to 160	Specially designed for automotive wheel bearings, chassis points on on-road and off-road vehicles.	NLGI GC-LB
PEERLESS LLG	2	Calcium Sulphonate Complex (Colour = Burgundy)	-20 to 200	Recommended for "sealed-for-life" bearings, other high temperature and long-life applications. Designed to match the performance of Polyurea greases.	NLGI GC-LB NLGI HPM
PEERLESS OG1	1	Calcium Sulphonate Complex (Colour = Tan)	-30 to 163	Recommended for applications requiring water resistance. Effective at resisting changes in consistency and still providing rust protection.	NLGI GC-LB
PEERLESS OG2	2	Calcium Sulphonate Complex (Colour = Tan)	-25 to 163	Recommended for applications requiring water resistance. Effective at resisting changes in consistency and still providing rust protection.	NLGI GC-LB
PEERLESS OG2 Red	2	Calcium Sulphonate Complex (Colour = Red)	-25 to 163	Recommended for applications requiring water resistance. Effective at resisting changes in consistency and still providing rust protection. Dyed red for applications requiring greater grease visibility.	NLGI GC-LB NLGI HPM
PEERLESS 3 MOLY 322	2	Calcium Sulphonate Complex (Colour = Grey)	-15 to 170	Recommended for grease lubricated pins, joints, bushings and bearings of machinery found in industrial plants, agriculture, off-highway, construction and mining industries, and an excellent option for fifth wheels on over-the-road Class 8 trucks.	

AUTOMATIC TRANSMISSION FLUIDS Recommended Applications

OEM SPECIFICATION	DuraDrive™ HD Synthetic 668	DuraDrive HD Synthetic Blend ATF
	This ATF is suitable for use in heavy duty fleets for extended oil drain intervals. Refer to the OEM oil drain interval recommendations for your application and service type.	This ATF is suitable for use in heavy duty fleets for standard and extended oil drain intervals. Refer to the OEM oil drain interval recommendations for your application and service type.
Allison TES 668®*	Approved (AN668-10012020)	-
Allison C-4 (legacy)	-	C-4 29493700
Voith H55.6335.xx (standard drain, 60K km) xx- VTI-DIWA Service Bulletins 013 and 118	Approved	Approved
Voith H55.6336.xx (extended drain, 120K km)	-	Approved
Voith 150.014524.xx (maximum drain, 180K km) xx- VTI-DIWA Service Bulletins 013 and 118	-	-
ZF TE-ML 14B, 14C (standard drain - for on-highway use in buses and coaches only)	SFU	-
ZF TE-ML 14B (extended drain)	-	Approved (ZF004790)
ZF TE-ML 03D, 04D, 17C	-	Approved (ZF004790)
ZF TE-ML 16L (obsolete)	SFU	-
ZF TE-ML 14C, 20C (extended drain)	-	-
ZF TE-ML 04D, 16M, 16S, 25C	-	-
MAN 339 Typ V2, Z2	-	SFU
MAN 339 Typ Z3, Z12	-	-
Mercedes-Benz MB 236.1/ .5/ .6/ .7	-	SFU
Mercedes-Benz MB 236.9/ DTFR 13C170	-	-
Mercedes-Benz MB 236.92/ DTFR 13C190	Approved	-
Volvo STD 1273.41 - transmission oil 97341 (AT101)	Approved (#97341-086)	SFU
Caterpillar TO-2 (obsolete)	-	SFU
Ford MERCON® V	-	SFU
GM DEXRON™-III(H), -III(G), -II(E), or -II	SFU	SFU

They can also be used as a hydraulic or power steering fluids. SFU = Suitable for use. *DuraDrive HD Synthetic 668 meets and exceeds the TES 668® specification and is backwards compatible for every Allison transmission that currently requires approved TES 295® ATF. TES 295® and TES 668® are trademarks of Allison Transmission, Inc. DEXRON™ is a registered trademark of General Motors LLC. MERCON® is a registered trademark of Ford Motor Company.



OUR NO-NONSENSE LUBRICANTS WARRANTY

Petro-Canada Lubricants will repair damaged equipment, or replace damaged equipment parts resulting from a failure due to defects of the Petro-Canada lubricant, as long as the lubricant is used in accordance with your equipment manufacturer's and our recommendations.

IT'S MORE THAN JUST A WARRANTY. IT'S A COMMITMENT.

To learn more about how Petro-Canada Lubricants can help your business visit: petrocanadalubricants.com or contact us at lubecsr@hfsinclair.com

Committed to the disciplined operation of our business.



Trademarks are owned or used under license.
LUB2977E (2025.05)

AN HF SINCLAIR BRAND